


How to...


Attach Barre Connectors to Parallel Stability Barres

Step 1

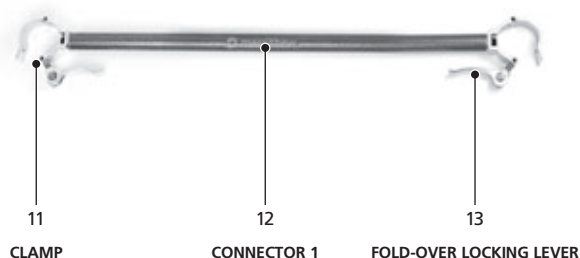

1. Assemble two Stability Barres as shown in your Stability Barre Owner's Manual.
2. To open clamp [11]: release the fold-over locking lever [13] and fold it away from the clamp [fig.A].
3. Place the clamp [11] around the telescopic support (upright) [7] positioning it against the weighted base plate [8]. Close and lock the clamp using the fold-over locking lever [fig.B]

Step 2

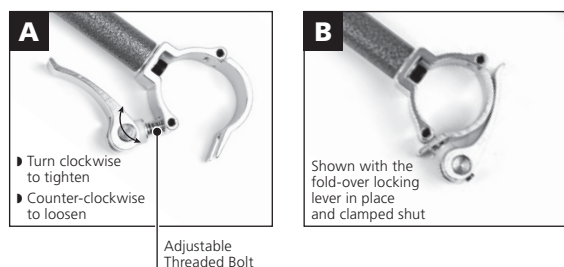


NOTE: Fold-over locking lever may be rotated clockwise or counter-clockwise to adjust the length of the lever's threaded bolt [fig.A].

4. Attach the other end of the connector to the second Stability Barre at the same height.
5. Attach the second clamp to the telescopic support (upright) [7] just below the pop-up pin [6].
6. Repeat steps 2-5 until all connectors are attached and the unit is fully assembled.

NOTE: Parallel Stability Barres include all connectors.

Step 3

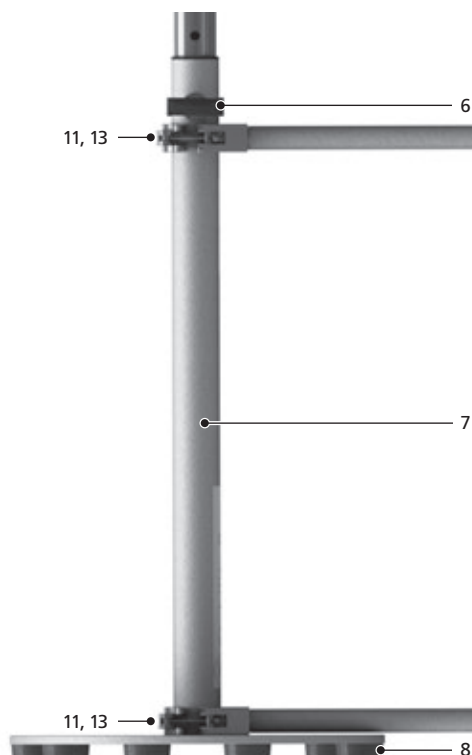



6' OR 8' REQUIRE 4 CONNECTORS



12' REQUIRE 6 CONNECTORS

If you have purchased single 6', 8' or 12' Stability Barres and wish to join them together, connectors are also sold separately in pairs.

Shown with the fold-over locking lever in place and clamped shut.

PM-0004N™ is a trademark or registered trademark of Merrithew Corporation, used under license. All rights reserved.



For more information contact our Customer Service

1.800.910.0001 ext. 0907 | 0800.328.5676 ext. 0907 (UK)

416.482.4050 ext. 0907 (Customer Care)

customerservice@merrithew.com

merrithew.com

STOTT PILATES®

zenoga®

CORE™

totalbarre.

HALO TRAINING