



How to...

Attach Barre Connectors to Parallel Stability Barres


Step 1

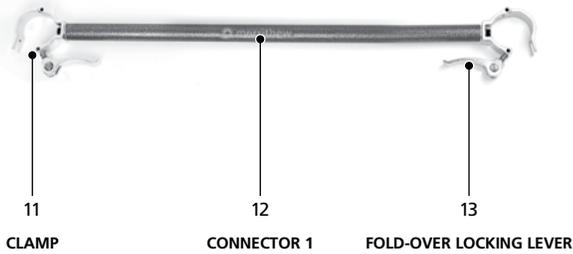

Step 2

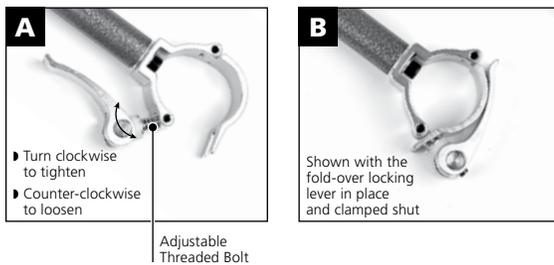

Step 3

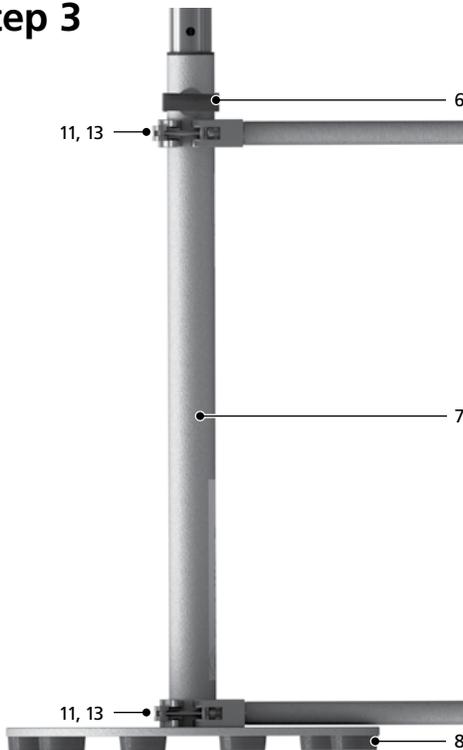

Step-by-Step

1. Assemble two Stability Barres as shown in your Stability Barre Owner's Manual.
 2. To open clamp [11]: release the fold-over locking lever [13] and fold it away from the clamp [fig.A].
 3. Place the clamp [11] around the telescopic support (upright) [7] positioning it against the weighted base plate [8]. Close and lock the clamp using the fold-over locking lever [fig.B]
- NOTE:** Fold-over locking lever may be rotated clockwise or counter-clockwise to adjust the length of the lever's threaded bolt [fig.A].
4. Attach the other end of the connector to the second Stability Barre at the same height.
 5. Attach the second clamp to the telescopic support (upright) [7] just below the pop-up pin [6].
 6. Repeat steps 2-5 until all connectors are attached and the unit is fully assembled.

NOTE: Parallel Stability Barres include all connectors.



6' OR 8' REQUIRE 4 CONNECTORS



12' REQUIRE 6 CONNECTORS

If you have purchased single 6', 8' or 12' Stability Barres and wish to join them together, connectors are also sold separately in pairs.

Shown with the fold-over locking lever in place and clamped shut.

For more information contact our Customer Service

1.800.910.0001 ext. 288 | 0800.328.5676 ext. 288 (UK) | 416.482.4050 ext. 288 (Customer Care)
customerservice@merrithew.com | merrithew.com

